

1040 FTM


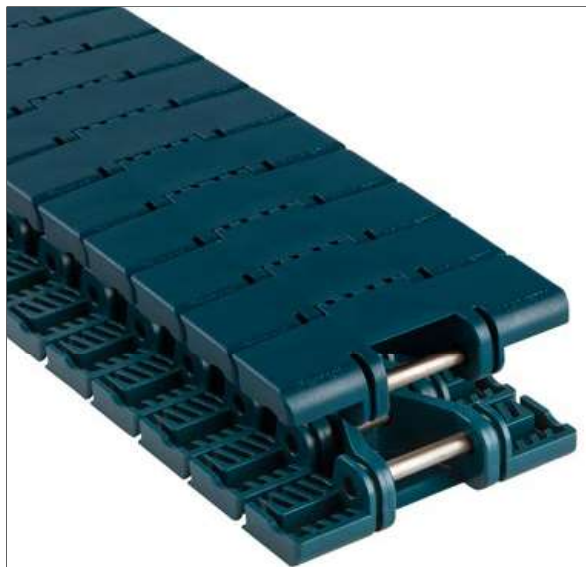


Photo shows 1040 FTM TableTop Chain with Magnetflex Retention molded in XLG material.

Chain Information

Chain Width desc	Chain Width		Min. Side-flex Radius		Approximate Weight	
	in	mm	in	mm	lbs/ft	kg/m
3.3IN	3.3	83.8	19.7	500	0.67	1.00

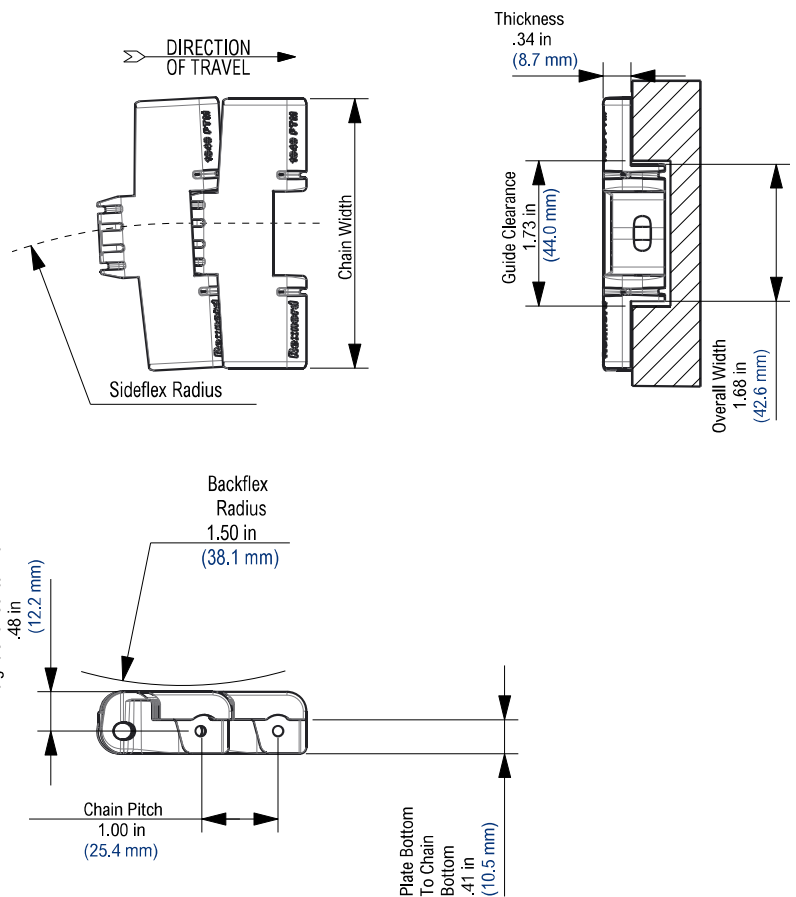

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature						Chain Strength		FDA Approval
			Fahrenheit			Celsius					
			min	max		min	max		lbs	N	
			dry	wet		dry	wet				
Standard Materials											
XLG	Low Friction Green	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes
HP	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop, HP and Magnetflex are trademarks of Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Must be used with Magnetflex corner tracks for side-flexing applications. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.