

1040 FGM


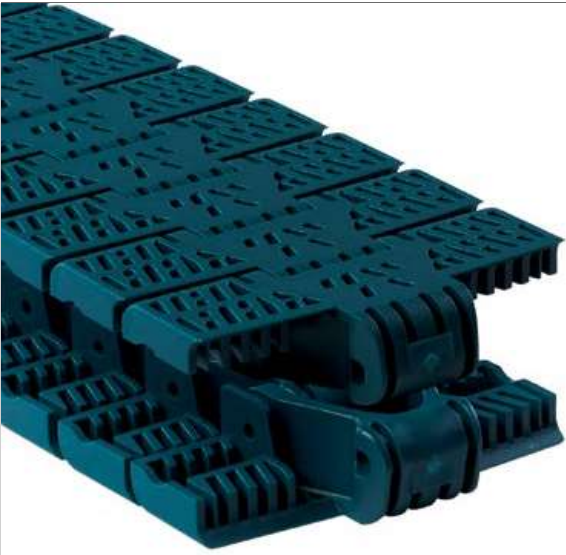


Photo shows 1040 FGM TableTop Chain with Magnetflex Retention molded in XLG material.

Chain Information

Chain Width			Min. Side-flex Radius		Approximate Weight	
desc	in	mm	in	mm	lbs/ft	kg/m
3.3IN	3.3	83.8	19.7	500	0.64	0.95

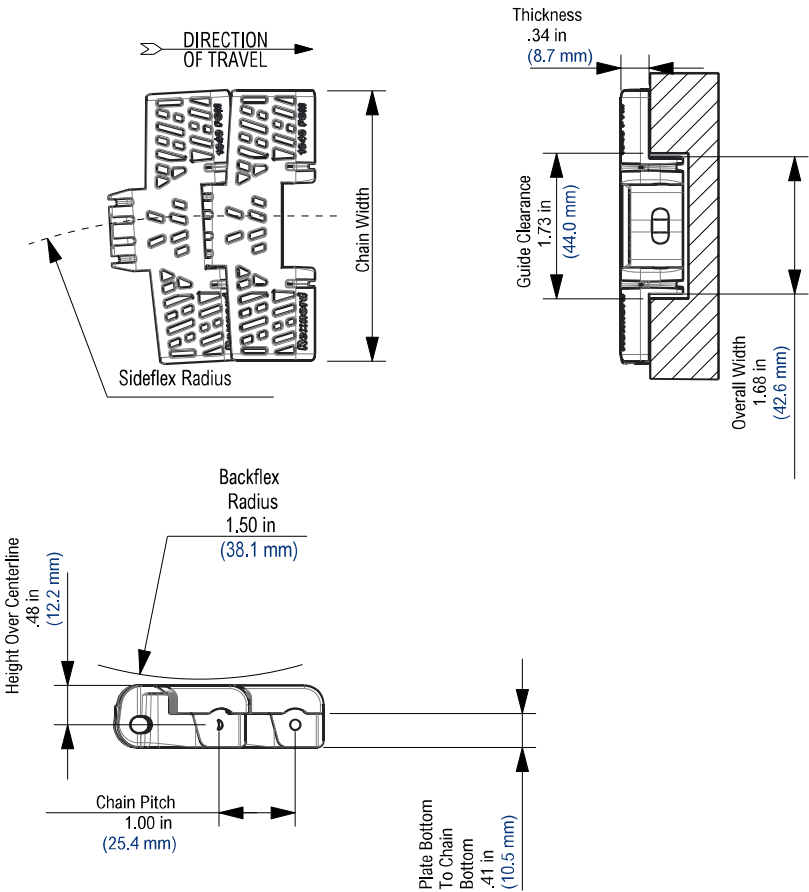

Available Materials

Prefix	Chain Material	Standard Pin Material	Temperature							Chain Strength		FDA Approval
			Fahrenheit			Celsius						
			min	max		min	max					
				dry	wet		dry	wet	lbs	N		
Standard Materials												
XLG	Low Friction Green	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes	
HP	High Performance	Stainless Steel	-40	+180	+150	-40	+82	+66	337	1,500	Yes	

Regulatory Information

The Food and Drug Administration (FDA) accepts certain materials for direct food contact. FDA approved material is compliant to FDA 21 CFR § 177. Rexnord, TableTop, HP and Magnetflex are trademarks of Rexnord Corporation. All rights reserved.

Additional Notes

Non-Standard products are non-returnable. Minimum order quantity and additional setup charges may also apply. Must be used with Magnetflex corner tracks for side-flexing applications. Open area = 35%. Chain strength is listed at room temperature. NR = Not Recommended. For additional material information, see material portfolio.