


NS8500 Thermoplastic Split Sprocket

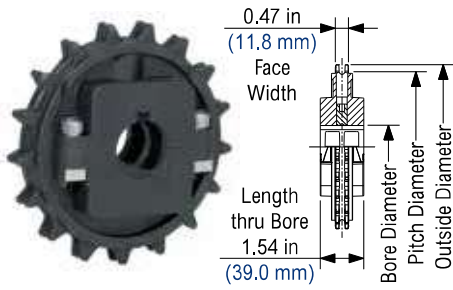

NS8500 Thermoplastic Split Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight			
						Round				Square				in		mm					
						in	mm	min	max	min	max	min	max	min	max	min	max			min	max
actual	effect	in	mm	in	mm	min	max	min	max	min	max	min	max	min	max	min	max	min	max	lbs	kg
17	17	4.120	104.65	4.15	105.4	1	1 1/2	25	40	1	1 1/2	25	40	1	1 1/2	25	40	0.48	0.22		
21	21	5.079	129.01	5.12	130.0	1	2	25	50	1	2	25	50	1	2	25	50	0.58	0.26		
24	24	5.800	147.32	5.84	148.3	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.68	0.31		
25	25	6.040	153.42	6.09	154.7	1	2 1/2	25	65	1	2 1/2	25	65	1	2 1/2	25	65	0.78	0.35		
27	27	6.521	165.63	6.57	166.9	1	2 5/8	25	65	1	2 1/2	25	65	1	3	25	75	1.18	0.54		

Imperial shaft-ready round bore sprockets are shipped with keyway and setscrew. Metric shaft-ready round bore sprockets are shipped with keyway and no setscrew. Idler bores are designed to spin freely on the shaft.