


昭合貿易有限公司

CHAO HO TRADING



High-Quality Chain Belt



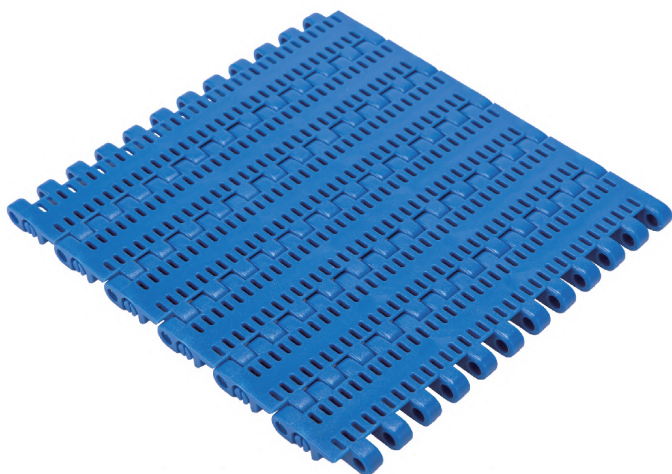


型號：ST254 - 003

網帶材質	顏色
P P	白
P E	白
POM	藍


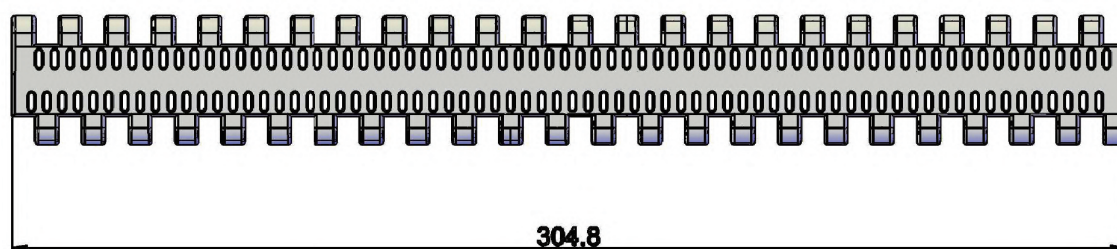


網帶材質	POM	P P	P E
最大負載拉力	23500 $\frac{\text{N}}{\text{m}}$	15000 $\frac{\text{N}}{\text{m}}$	10000 $\frac{\text{N}}{\text{m}}$
耐溫 (乾)	-40 °C ~ 80 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C
耐溫 (濕)	-40 °C ~ 65 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C

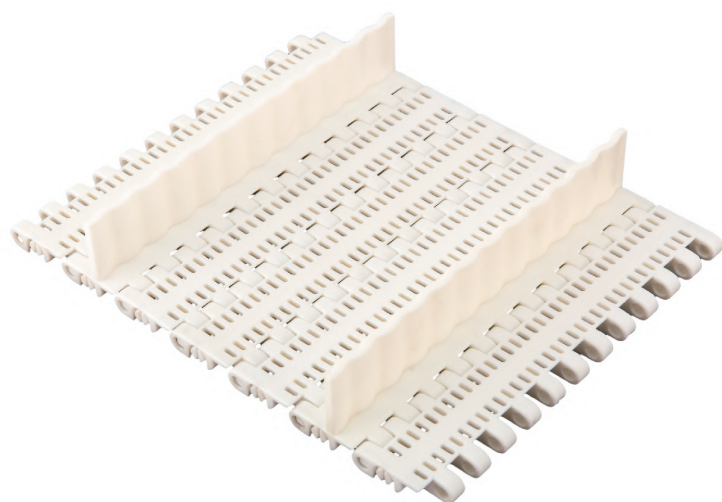


型號：ST254 擋板

網帶材質	顏色	高度
P P	白	25 / 50
P E	白	25 / 50
POM	藍	25 / 50

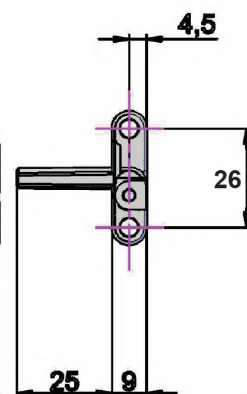
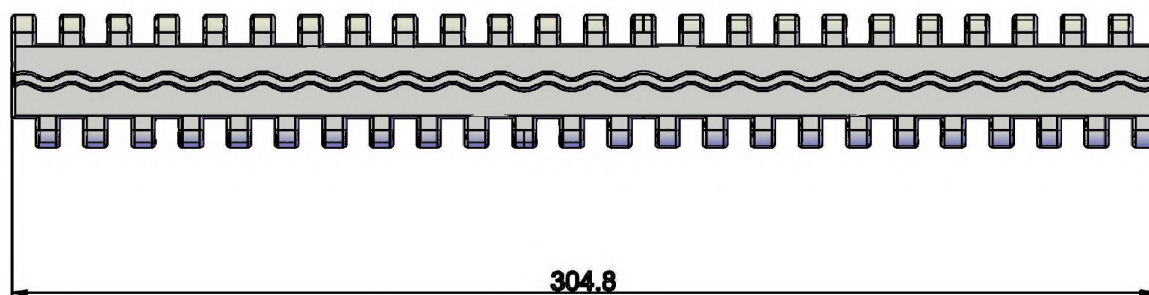


單位:mm

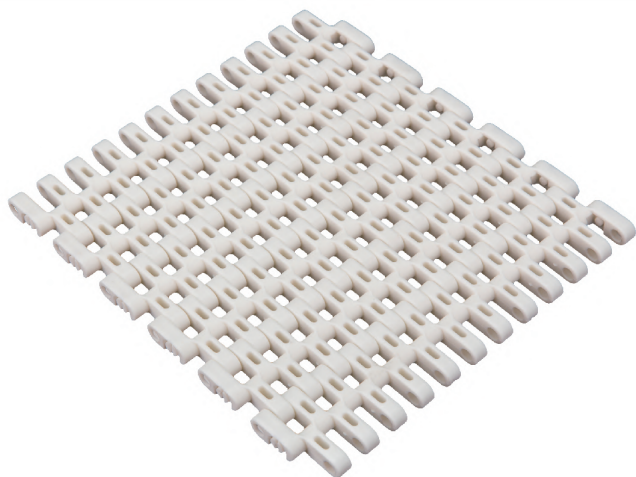

型號：ST254 - 004




網帶材質	顏色
P P	白
P E	白
POM	藍

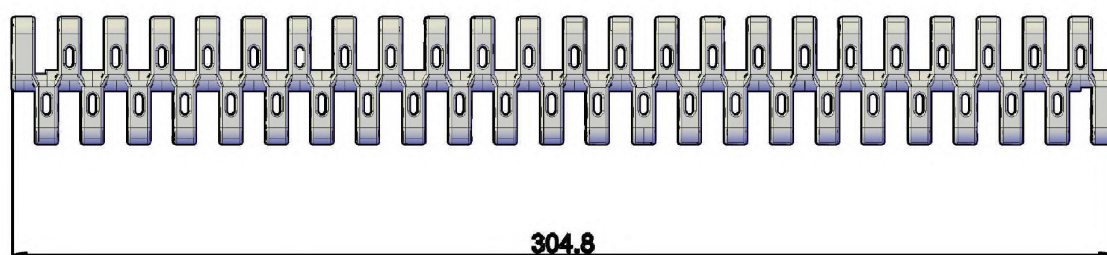

網帶材質	POM	P P	P E
最大負載拉力	23500 $\frac{\text{N}}{\text{m}}$	15000 $\frac{\text{N}}{\text{m}}$	10000 $\frac{\text{N}}{\text{m}}$
耐溫 (乾)	-40 °C ~ 80 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C
耐溫 (濕)	-40 °C ~ 65 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C

型號：ST254 擋板




網帶材質	顏色	高度
P P	白	25 / 50
P E	白	25 / 50
POM	藍	25 / 50

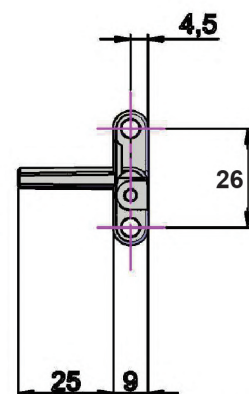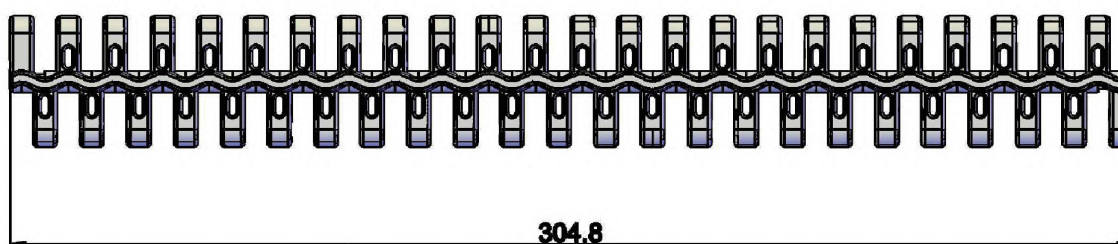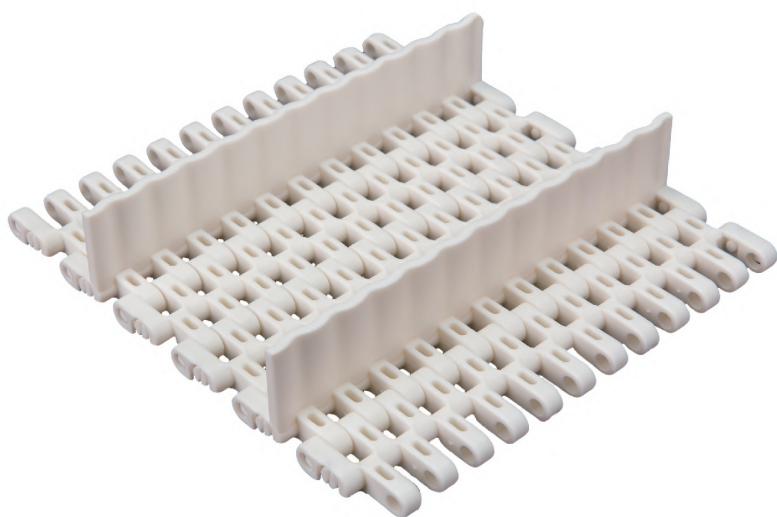

單位:mm

型號：ST254 - 005




網帶材質	顏色
P P	白
P E	白
POM	藍

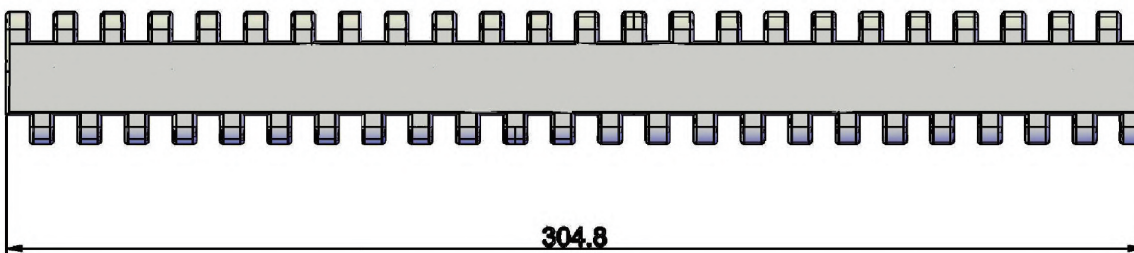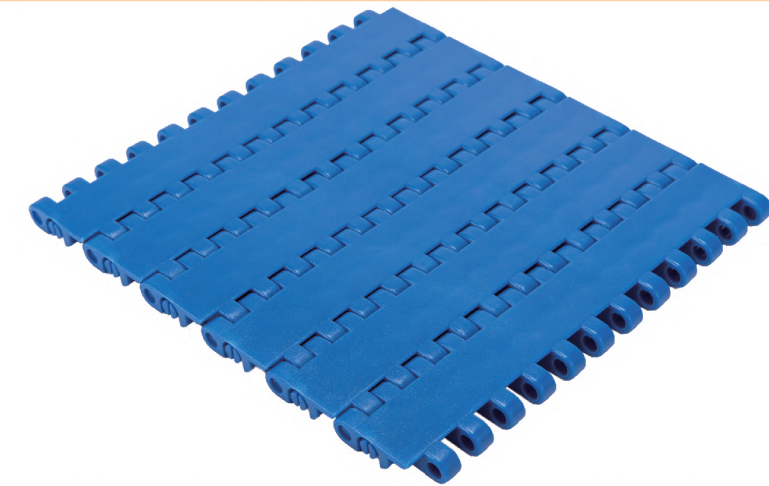


網帶材質	POM	P P	P E
最大負載拉力	23500 $\frac{\text{N}}{\text{m}}$	15000 $\frac{\text{N}}{\text{m}}$	10000 $\frac{\text{N}}{\text{m}}$
耐溫 (乾)	-40 °C ~ 80 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C
耐溫 (濕)	-40 °C ~ 65 °C	+5 °C ~ 105 °C	-70 °C ~ 35 °C

型號：ST254 擋板

網帶材質	顏色	高度
P P	白	25 / 50
P E	白	25 / 50
POM	藍	25 / 50

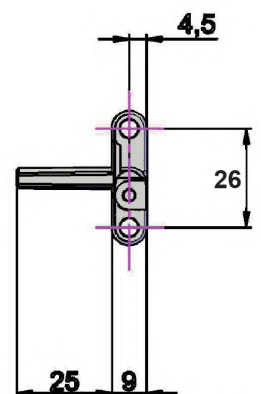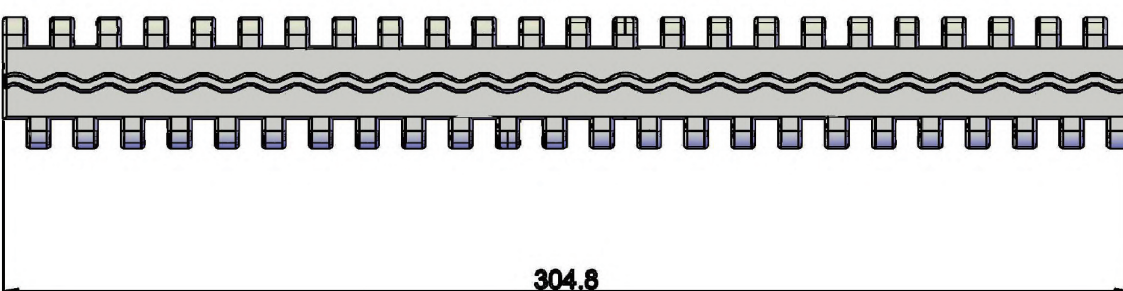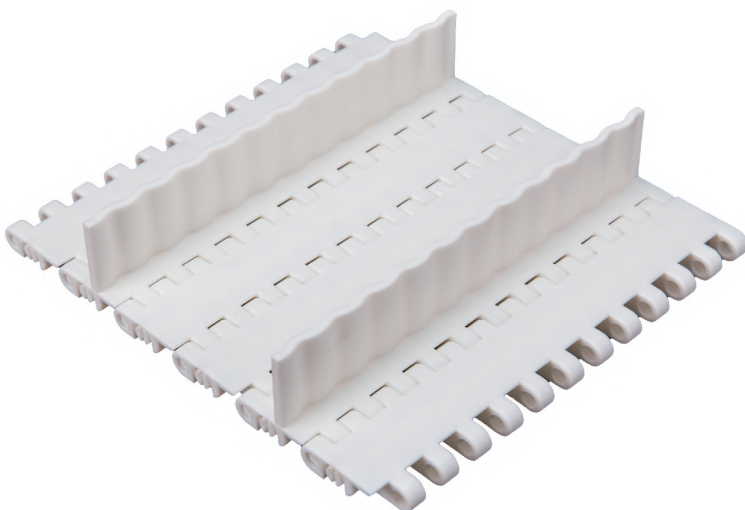


單位:mm

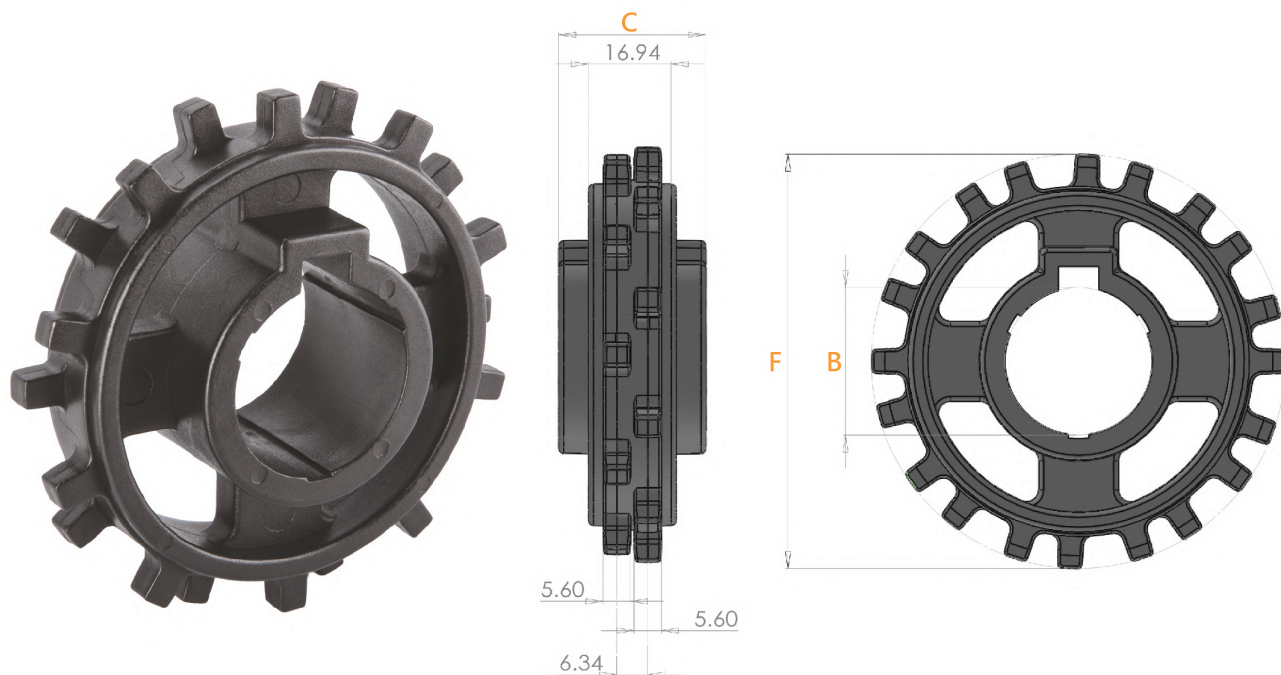

型號：ST254 齒輪 - 10T


節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
82.2	84.89	25	30.1	8 x 3.5
82.2	84.89	30	30.1	8 x 4

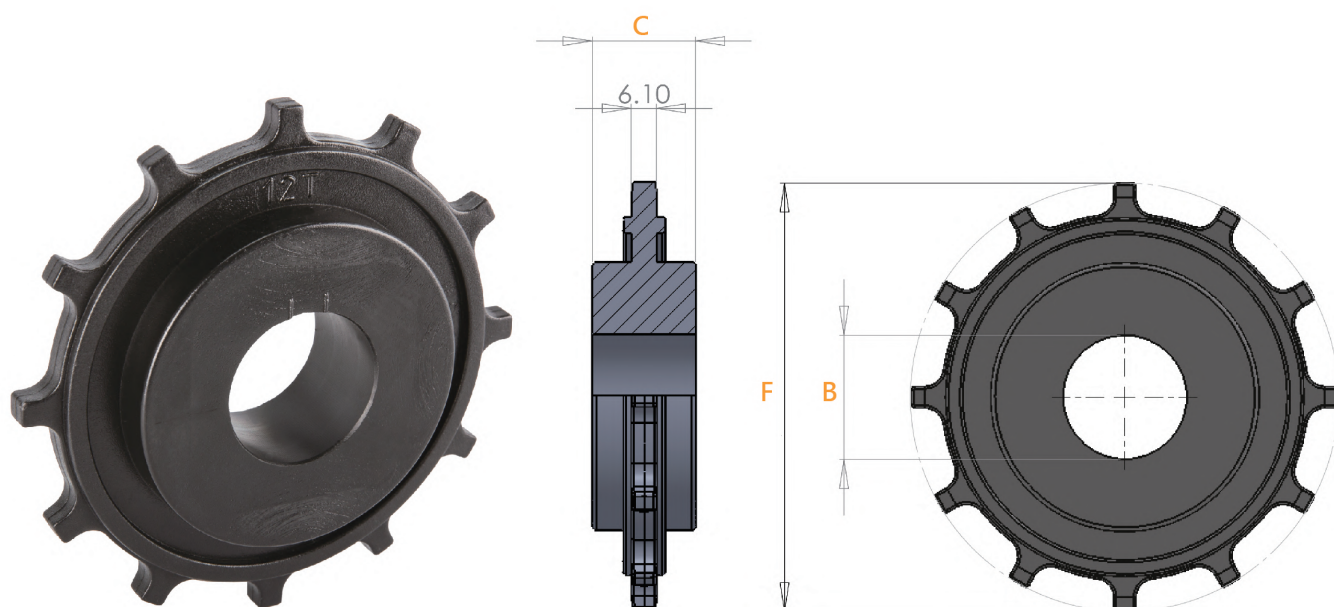

型號：ST254 齒輪 - 12T


節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
98.1	103.5	25	25	8 x 3.5
98.1	103.5	30	25	8 x 4

單位:mm

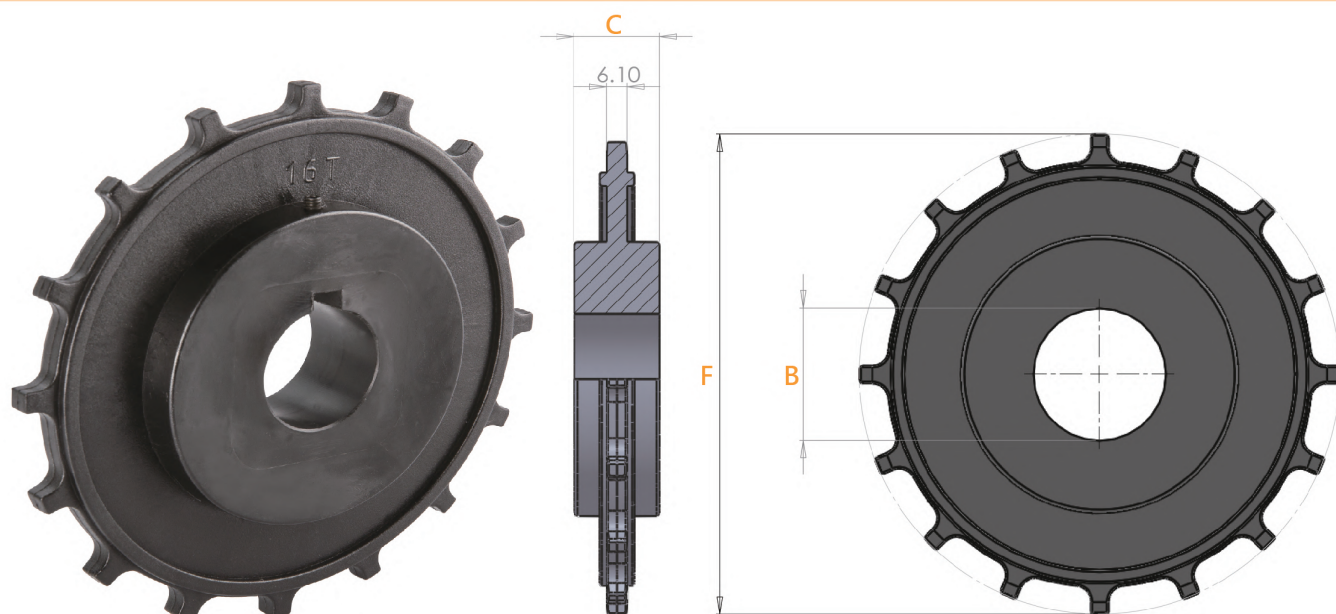

型號：ST254 齒輪 - 16T


節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
130.2	138.1	38.1 x 38.1	25	
130.2	138.1	30	25	8 x 4

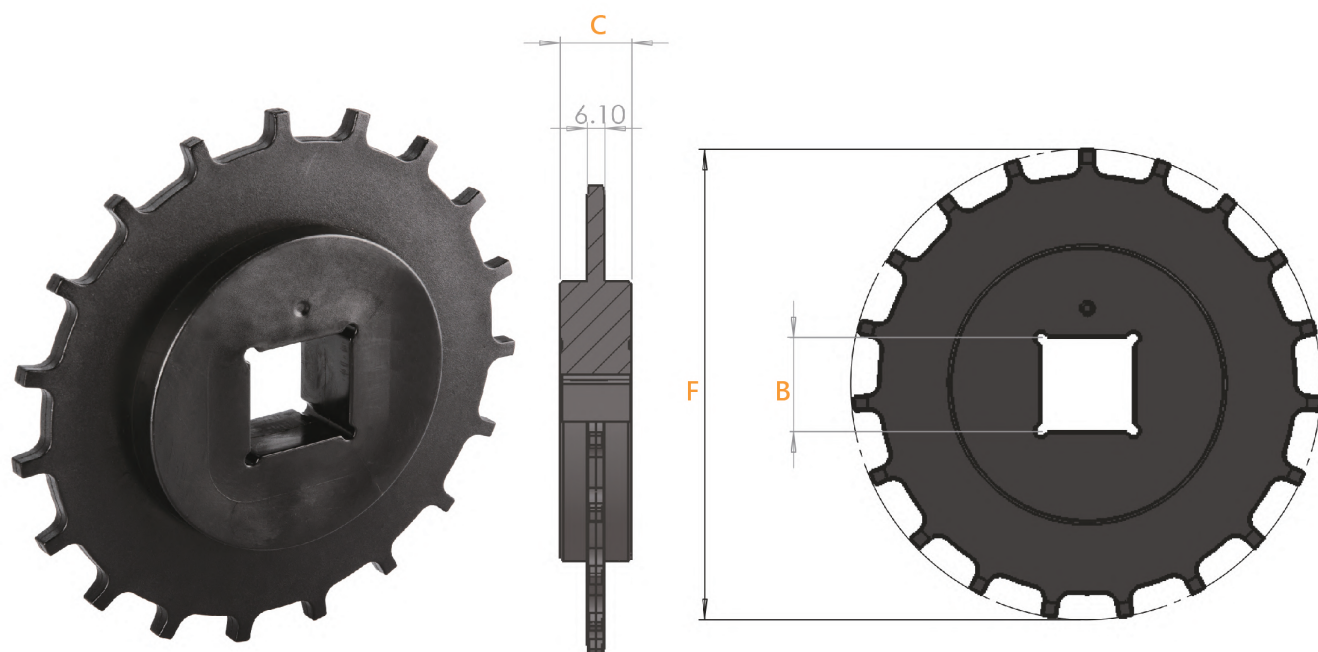

型號：ST254 齒輪 - 19T


節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
154.3	164	31.75 x 31.75	25	
154.3	164	25	25	8 x 3.5
154.3	164	30	25	8 x 4
154.3	164	40	25	12 x 4

單位:mm

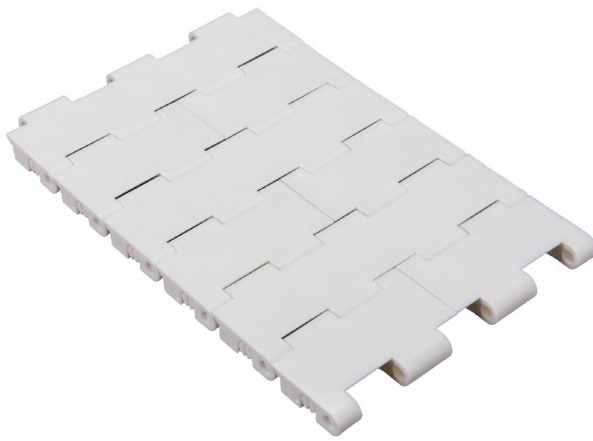


型號：ST381 - PF

網帶材質	顏色
P P	白
P E	白
POM	咖啡

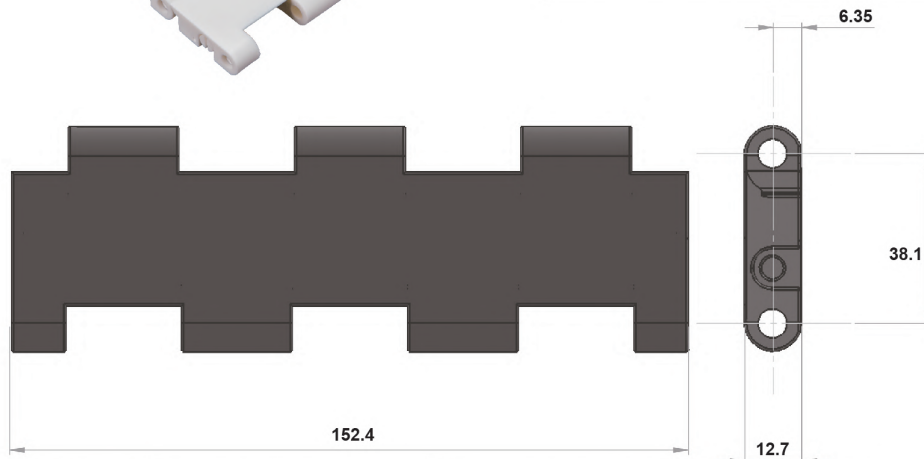


網帶材質	POM	P P	P E
最大負載拉力	17500 $\frac{\text{N}}{\text{m}}$	8750 $\frac{\text{N}}{\text{m}}$	5830 $\frac{\text{N}}{\text{m}}$
耐溫 (乾)	-40℃~ 80℃	+5℃~ 105℃	-70℃~ 35℃
耐溫 (濕)	-40℃~ 65℃	+5℃~ 105℃	-70℃~ 35℃

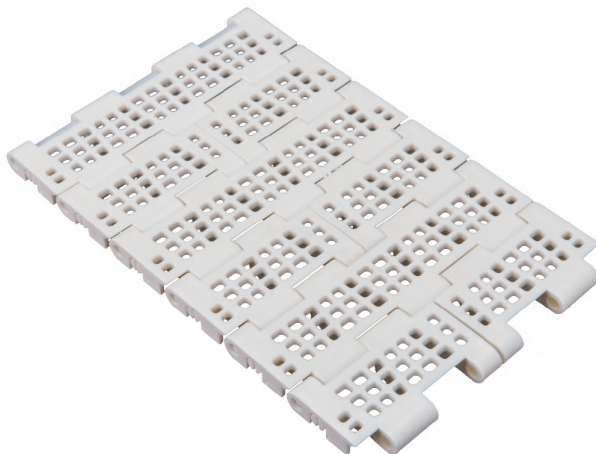


型號：ST381 - PP

網帶材質	顏色
P P	白
P E	白
POM	咖啡


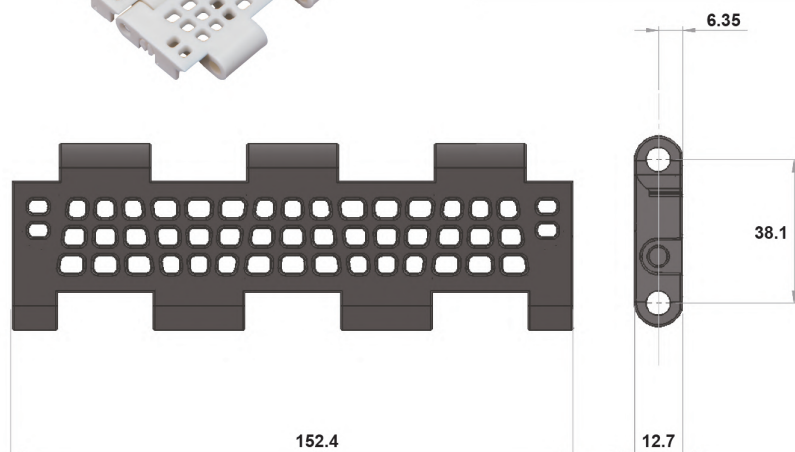


單位:mm

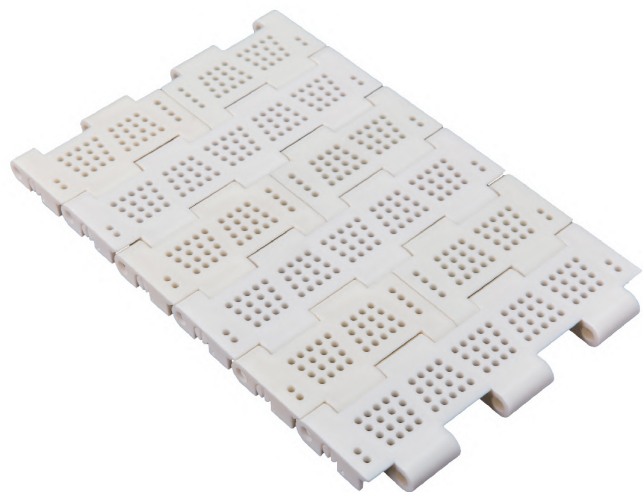

型號：ST381 - PH

網帶材質	顏色
P P	白
P E	白
POM	咖啡


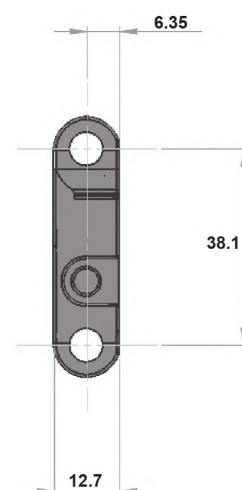
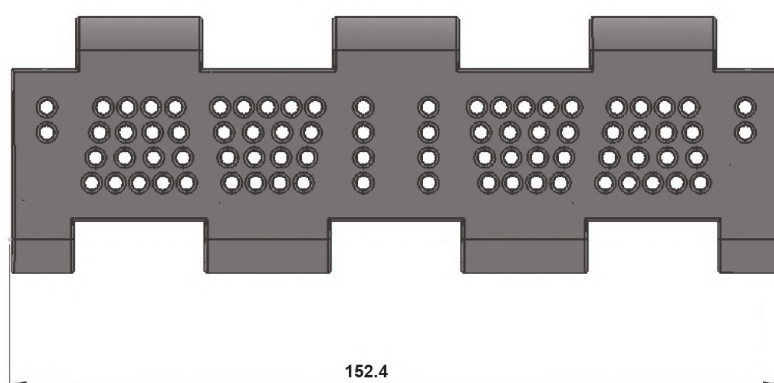


網帶材質	POM	P P	P E
最大負載拉力	17500 $\frac{\text{N}}{\text{m}}$	8750 $\frac{\text{N}}{\text{m}}$	5830 $\frac{\text{N}}{\text{m}}$
耐溫 (乾)	-40°C ~ 80°C	+5°C ~ 105°C	-70°C ~ 35°C
耐溫 (濕)	-40°C ~ 65°C	+5°C ~ 105°C	-70°C ~ 35°C




型號：ST381 平面擋板

網帶材質	顏色	高度
P P	白	50 / 100
P E	白	50 / 100







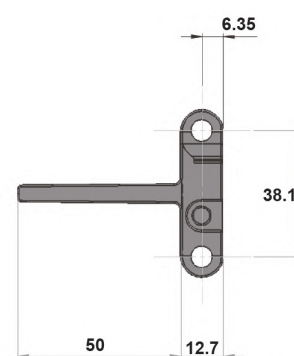
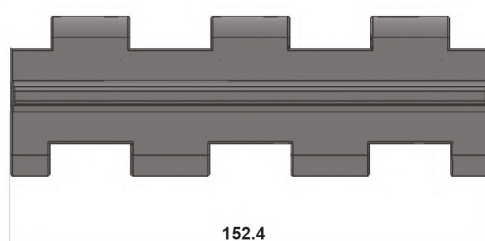



單位:mm

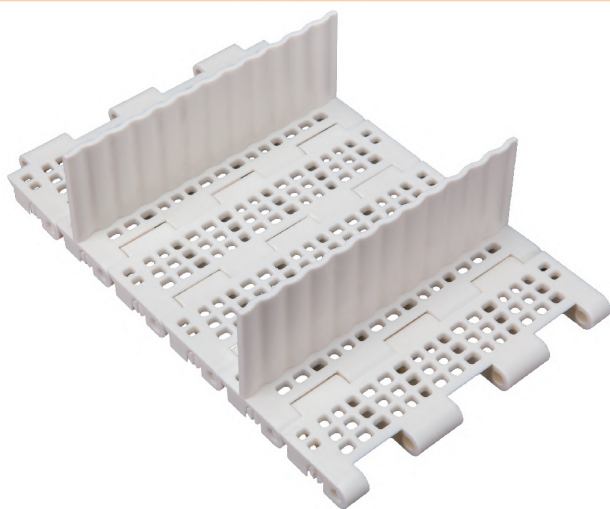

型號：ST381 波浪擋板






網帶材質	顏色	高度
P P	白	50
P E	白	50

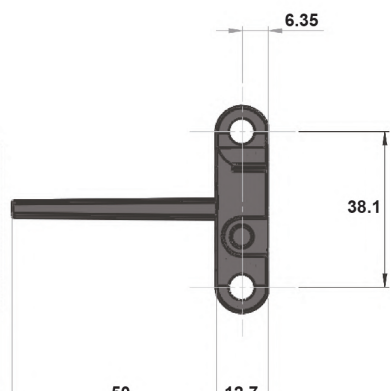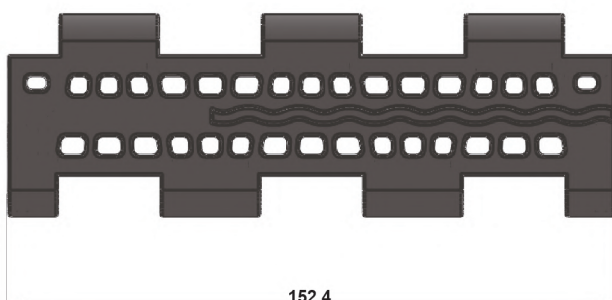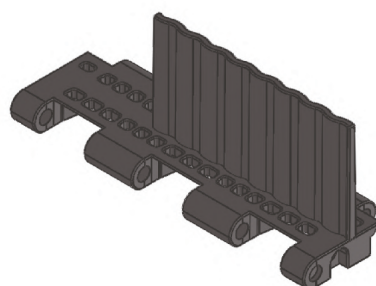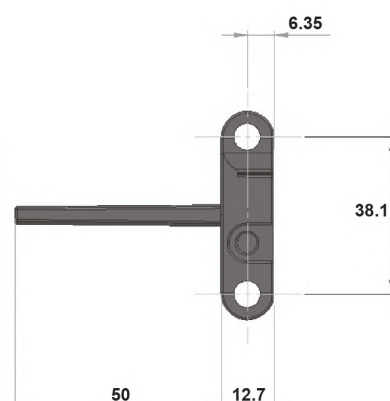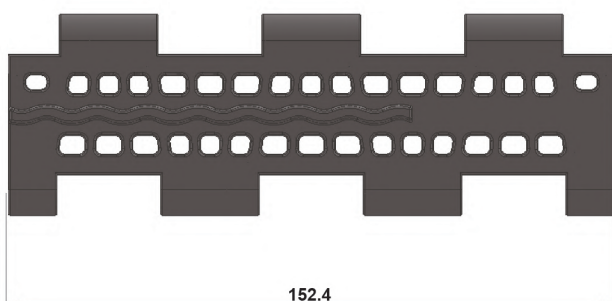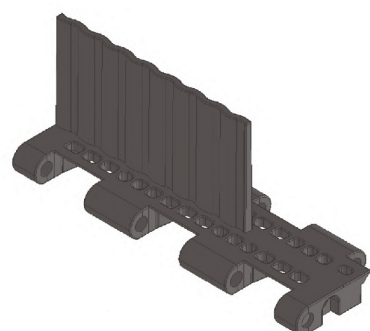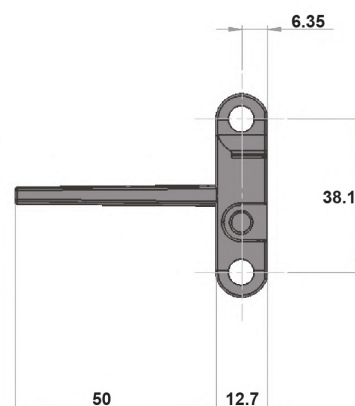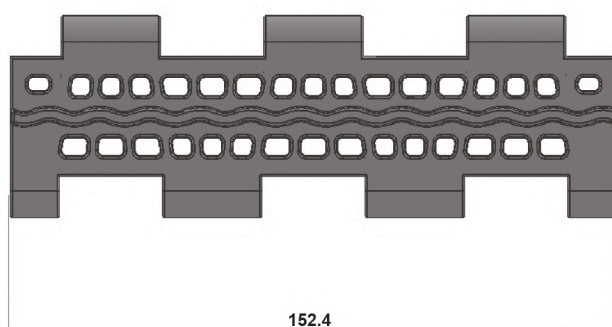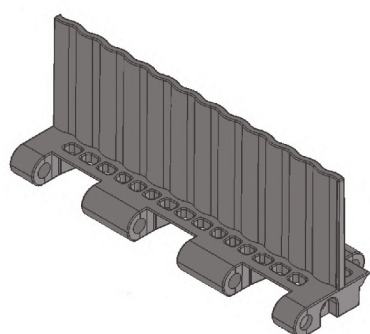


單位:mm

型號：ST381 - 側邊擋板 / 裙邊


網帶材質	顏色	高度	寬度
P P	白	30 / 50 / 80	78.6 / 95.4 / 114.6
P E	白	30 / 50 / 80	78.6 / 95.4 / 114.6

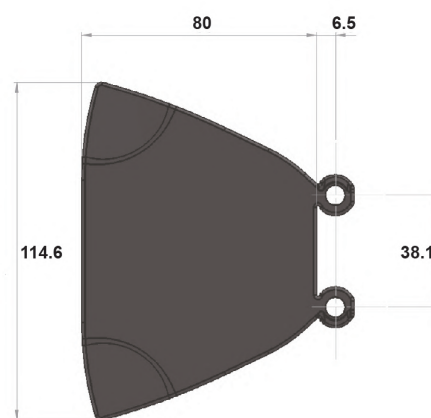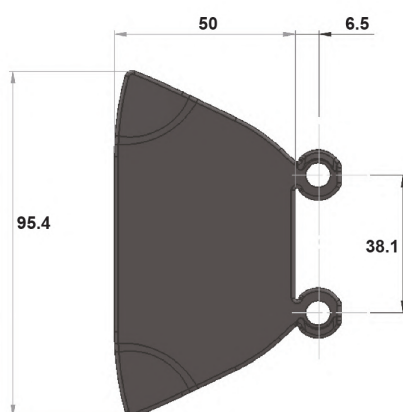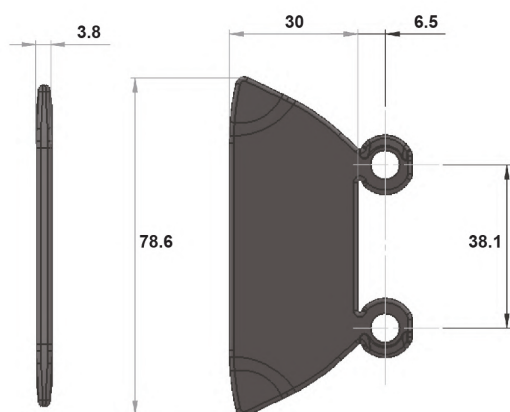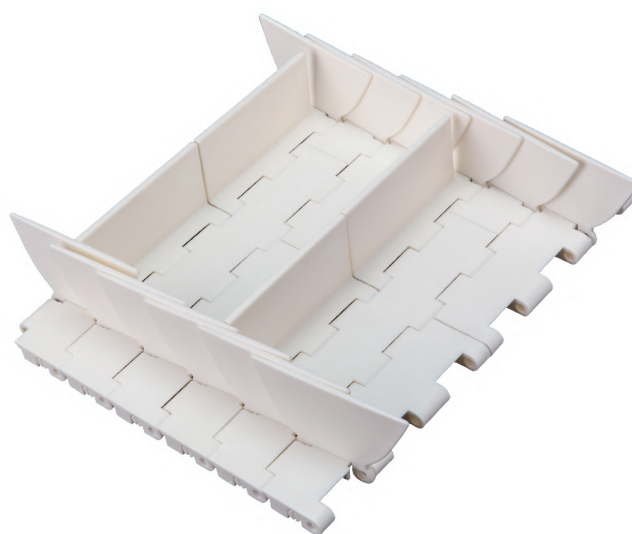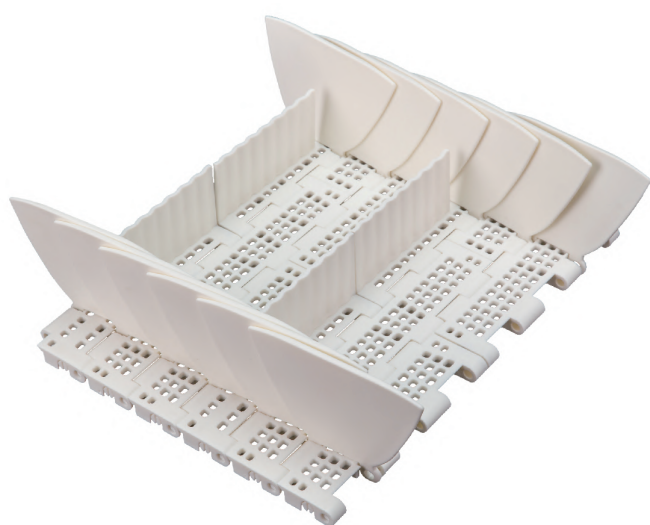

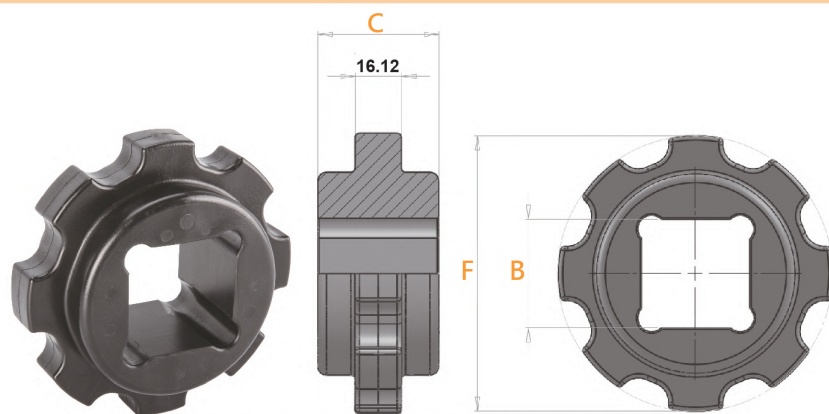


型號：ST381 齒輪 - 08T

齒輪外徑 F	孔徑 B	厚度 C
97.07	38.1 x 38.1	42.1

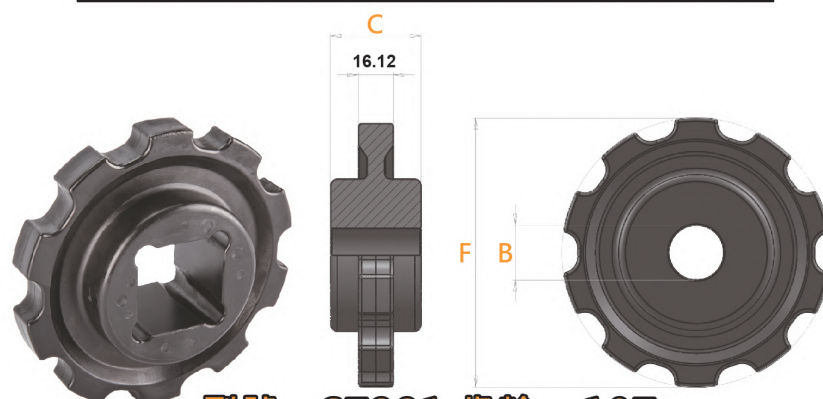

型號：ST381 齒輪 - 10T

節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
123.3	122.2	38.1 x 38.1	42.1	
123.3	122.2	25	42.1	8 x 3.5
123.3	122.2	30	42.1	8 x 4
123.3	122.2	35	42.1	10 x 4
123.3	122.2	40	42.1	12 x 4

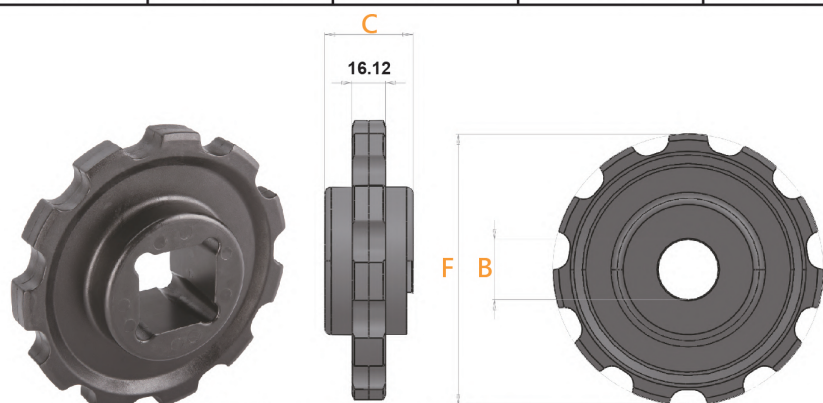

型號：ST381 齒輪 - 11T

節圓直徑 E	齒輪外徑 F	孔徑 B	厚度 C	鍵槽
135.2	134.08	38.1 x 38.1	42.1	
135.2	134.08	25	42.1	8 x 3.5
135.2	134.08	30	42.1	8 x 4
135.2	134.08	35	42.1	10 x 4
135.2	134.08	40	42.1	12 x 4

單位:mm



Conveyor Chains, Rollers, Components

昭合貿易有限公司

CHAO HO TRADING CO., LTD.

TEL : +886 - 3 - 222 - 5666 FAX : +886 - 3 - 222 - 5662
chanmonn@ms58.hinet.net 33852桃園市蘆竹區南山路二段87號

www.chaoho.com.tw