



Split Sprockets and Idlers Machined

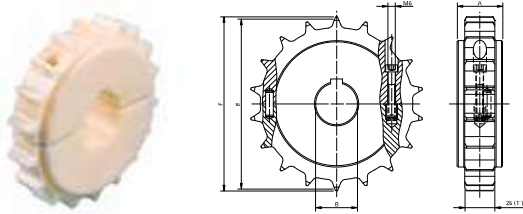

Split Sprockets and Idlers Moulded

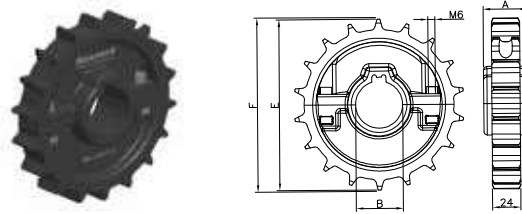

Sprocket Type	Code Number	Number of Teeth	Bore	Pitch Diameter	Outside Diameter	Hub Width
			B	E	F	A
			mm/inch	mm	mm	mm
Split Sprockets and Idlers Machined						
Sprockets with Round Bores						
SS 1005 18-30	894.30.67	18	30 mm	146.3	145.3	38
SS 1005 18-40	894.30.61	18	40 mm			
SS 1005 21-30	894.33.67	21	30 mm	170.4	169.7	
SS 1005 21-40	894.33.61	21	40 mm			
SS 1005 18-1	894.30.86	18	1.0"	146.3	145.3	
SS 1005 18-1½	894.30.81	18	1.5"			
SS 1005 21-1	894.33.86	21	1.0"	170.4	169.7	
SS 1005 21-1½	894.33.81	21	1.5"			
Idlers						
SI 1005 18-30	894.30.77	18	30 mm	146.3	145.3	38
SI 1005 18-40	894.30.71	18	40 mm			
SI 1005 21-30	894.33.77	21	30 mm	170.4	169.7	
SI 1005 21-40	894.33.71	21	40 mm			
SI 1005 18-1	894.30.96	18	1.0"	146.3	145.3	
SI 1005 18-1½	894.30.91	18	1.5"			
SI 1005 21-1	894.33.96	21	1.0"	170.4	169.7	
SI 1005 21-1½	894.33.91	21	1.5"			
Sprockets with Square Bores						
SS 1005 18-40x40	894.30.21	18	40 mm	146.3	145.3	38
SS 1005 21-40x40	894.33.21	21	40 mm	170.4	169.7	
SS 1005 18-1½x1½	894.30.51	18	1.5"	146.3	145.3	
SS 1005 21-1½x1½	894.33.51	21	1.5"	170.4	169.7	

Split sprockets with keyways are 'tight fit' onto the shaft and can be used for belt widths up to 680 mm and temperature differences of max. 30°C. For wider belts or bigger temperature differences, square bores have to be used.

Square sprockets can be used on the drive- and on the idler shaft. They 'float' freely on the shaft.

Split Sprockets and Idlers Moulded						
Sprockets						
NSH 1005 13-40	899.20.61	13	40 mm	106,1	104,2	38
NSH 1005 14-40	899.24.61	14	40 mm	114,1	112,5	
NSH 1005 15-40	899.21.61	15	40 mm	122,1	120,7	
NSH 1005 16-40	899.25.61	16	40 mm	130,2	128,9	
NSH 1005 18-40	899.22.61	18	40 mm	146,3	145,3	
NSH 1005 21-40	899.23.61	21	40 mm	170,4	169,7	
Idlers						
NSH 1005 13-40	899.20.71	13	40 mm	106,1	104,2	38
NSH 1005 14-40	899.24.71	14	40 mm	114,1	112,5	
NSH 1005 15-40	899.21.71	15	40 mm	122,1	120,7	
NSH 1005 16-40	899.25.71	16	40 mm	130,2	128,9	
NSH 1005 18-40	899.22.71	18	40 mm	146,3	145,3	
NSH 1005 21-40	899.23.71	21	40 mm	170,4	169,7	