


# 強制式輸送滾筒

Fixed Drive Roller

# 14T-2

內牙軸心 Female threaded spindle

14T-2 雙排 塑/鐵 齒輪,使用RS40鏈條(1/2x5/16")  
14T-2 plastic sprocket for chain 1/2 x 5/16"

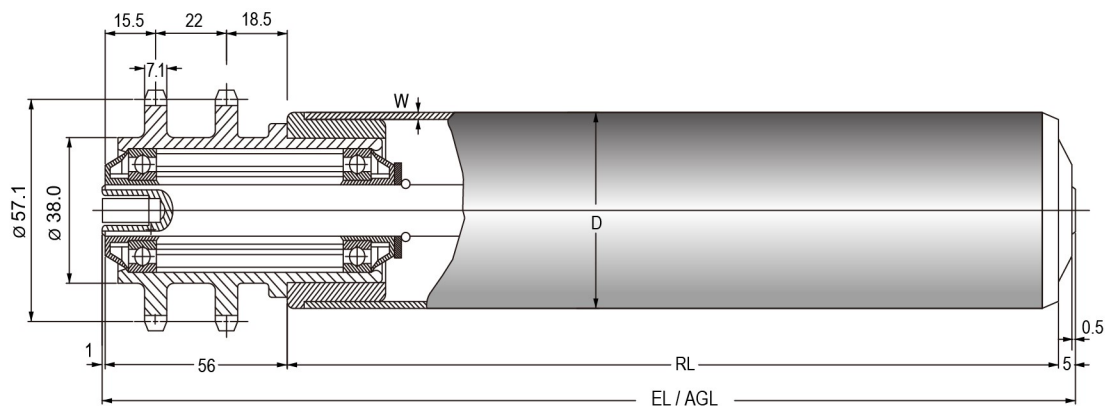

$$EL/AGL = RL + 62mm$$

外管材質 Tube Quality	管徑及管厚 D x W	齒輪/齒數 No. Teeth	料號:滾筒長度RL必須註明 軸心外徑 mm	
			12mm/M8*20	14mm/M8*20
ABS	50 X 2.8	14-2	FD2P50.28.12.14	FD2P50.28.14.14
	60 X 3.0	14-2	FD2P60.30.12.14	FD2P60.30.14.14
鋼鍍鋅 Zinc plated steel	42 X 2.0	14-2	FD2Z42.20.12.14	FD2Z42.20.14.14
	50 X 1.5	14-2	FD2Z50.15.12.14	FD2Z50.15.14.14
	57 X 1.5	14-2	FD2Z57.15.12.14	FD2Z57.15.14.14
	60 X 2.0	14-2	FD2Z60.20.12.14	FD2Z60.20.14.14
不鏽鋼 Stainless steel	42 X 2.0	14-2	FD2S42.20.12.14	FD2S42.20.14.14
	50 X 1.5	14-2	FD2S50.15.12.14	FD2S50.15.14.14
	60 X 2.0	14-2	FD2S60.20.12.14	FD2S60.20.14.14
包層管 Stainless-steel-clad tubes	42 X 2.0	14-2	FD2C42.20.12.14	FD2C42.20.14.14
	50 X 1.5	14-2	FD2C50.15.12.14	FD2C50.15.14.14
	57 X 1.5	14-2	FD2C57.15.12.14	FD2C57.15.14.14
	60 X 2.0	14-2	FD2C60.20.12.14	FD2C60.20.14.14

鋼製雙蓋工業軸承

Precision bearing 6002ZZ

光圓鐵軸心

Spindle Steel self color

訂貨時請註明EL的長度

Please specify the roller length EL when ordering

可供應鋼製染黑齒輪(訂貨時請註明)

Available in carbon steel with black finish sprockets